

Wind Mitigation Inspection Report



Property Address:

295 - 375 Woods Landing Trail Oldsmar, Florida 34677

Prepared For:

East Lake Woodlands Woods Landing

www.nealinspections.com



"Inspected once, Inspected right" "

www.Nachi.org





Neal Inspections LLC nealinspections@gmail.com



Troy Neal: (813) 545-5363

William Neal: (813) 352-4690

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 3/07/2024						
Owner Information						
Owner Name: East Lake Woodlands Woods Landing			Contact Person: Beverly			
Address: 295/305/315/325/335/345/355		nding Trail	Home Phone:			
City: Oldsmar	Zip: 3	34677	Work Phone:			
County: Pinellas			Cell Phone:			
Insurance Company:	1		Policy #:			
Year of Home: 1984 (40 years)	# of Stories: Two		Email: bneubecker@a	ameritechmail.com		
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.						
<u>Building Code</u> : Was the structure built the HVHZ (Miami-Dade or Broward con	unties), South Florida	Building Code (SFB	3C-94)?			
A. Built in compliance with the FBC a date after 3/1/2002: Building Perm			t in 2002/2003 provide a peri	mit application with		
B. For the HVHZ Only: Built in conprovide a permit application with a						
C. Unknown or does not meet the re	equirements of Answer	"A" or "B"				
2. Roof Covering: Select all roof covering OR Year of Original Installation/Replace covering identified.						
Permit	Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance		
☑ 1. Asphalt/Fiberglass Shingle 12/3	3/2013			П		
2. Concrete/Clay Tile						
☐ 3. Metal						
4. Built Up						
5. Membrane						
6. Other						
6. Other				Ш		
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.						
B. All roof coverings have a Miamiroofing permit application after 9/1/						
C. One or more roof coverings do no			•			
D. No roof coverings meet the requi	-					
3. Roof Deck Attachment : What is the we	eakest form of roof dec	ck attachment?				
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches of by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or we shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivary mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesi other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
						C. Plywood/OSB roof sheathing wi 24"inches o.c.) by 8d common nails decking with a minimum of 2 nails Any system of screws, nails, adhesi
Inspectors Initials TN Property Address	ss 295/305/315/325/3	<u> </u>	375 Woods Landing Ti	<u>all</u>		

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

		18	2 psf.	d Concrete Roof Deck.
		E.	Other:	
		F.	Unknown	or unidentified.
		G.	No attic a	ccess.
4.		et c	of the inside	achment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within e or outside corner of the roof in determination of WEAKEST type)
		A.	Toe Nails	Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
				Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mir	nim	— al conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:
	17111			Secured to truss/rafter with a minimum of three (3) nails, and
			✓	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	✓	В.	Clips	
				Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nai position requirements of C or D, but is secured with a minimum of 3 nails.
		C.	Single Wi	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D.	Double W	•• •
				Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
				Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		F.	Structural Other:	
				or unidentified
	Ш	Н.	No attic a	ccess
5.				What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A.	Hip Roof	
		В.	Flat Roof	Total length of non-hip features: feet; Total roof system perimeter: feet Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	V	C.	Other Roo	
6.		A. B.	SWR (als sheathing dwelling to No SWR.	r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) o called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss. or undetermined.
	_			
Ins	spec	tors	s Initials T	N Property Address 295/305/315/325/335/345/355/365/375 Woods Landing Trail
*T	hic v	zeri	ification fo	arm is valid for un to five (5) years provided no material changes have been made to the structure or

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. <u>Opening Protection</u>: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

•	Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure							
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
	Opening Protection products that appear to be A or B but are not verified							
N	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	X						

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).
with 24186 integers imputed (24 vol.11 in the tweet 40).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials TN **Property Address** 295/305/315/325/335/345/355/365/375

Woods Landing Trail

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter sprotective coverings not meeting the requirements of A	nswer "A", "B", or C" or sy	ation) All Glazed openings are protected with stems that appear to meet Answer "A" or "B"			
with no documentation of compliance (Level N in the ta	<i>'</i>	Classed an animal animal			
N.1 All Non-Glazed openings classified as Level A, B, C, on N.2 One or More Non-Glazed openings classified as Level table above					
N.3 One or More Non-Glazed openings is classified as Lev	el X in the table above				
X. None or Some Glazed Openings One or more Glaz	ed openings classified and L	evel X in the table above.			
MITIGATION INSPECTIONS MUST I Section 627.711(2), Florida Statutes, prov					
Qualified Inspector Name:	License Type: Home Inspector	License or Certificate #:			
Troy Neal Inspection Company:	Tiome mspector	HI-10032 Phone:			
Neal Inspections LLC		813-545-5363			
Qualified Inspector – I hold an active license as a ✓ Home inspector licensed under Section 468.8314, Florida Statut training approved by the Construction Industry Licensing Board	es who has completed the statut and completion of a proficienc				
Building code inspector certified under Section 468.607, Florida					
General, building or residential contractor licensed under Sectio Professional engineer licensed under Section 471.015, Florida S					
Professional engineer licensed under Section 471.015, Florida S Professional architect licensed under Section 481.213, Florida S					
Any other individual or entity recognized by the insurer as possed verification form pursuant to Section 627.711(2), Florida Statute	essing the necessary qualification	ons to properly complete a uniform mitigation			
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statutes, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I,					
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.					
Signature: Date:					
Date.					
An individual or entity who knowingly provides or utters a obtain or receive a discount on an insurance premium to w of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.					
Inspectors Initials TN Property Address 295/305/315/3	25/335/345/355/365/375	Woods Landing Trail			
*This verification form is valid for up to five (5) years provinaccuracies found on the form.	vided no material changes l	have been made to the structure or			

Page 4 of 4

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



295/305/315/325/335/345/355/365/375 Woods Landing



Side elevation



8d Ringshank Renail



Rear




Side elevation




8d Nails within 6"



Clips observed

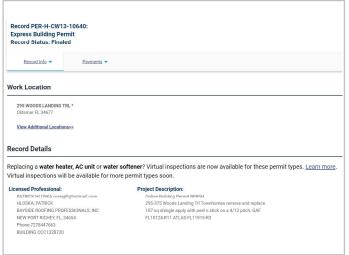

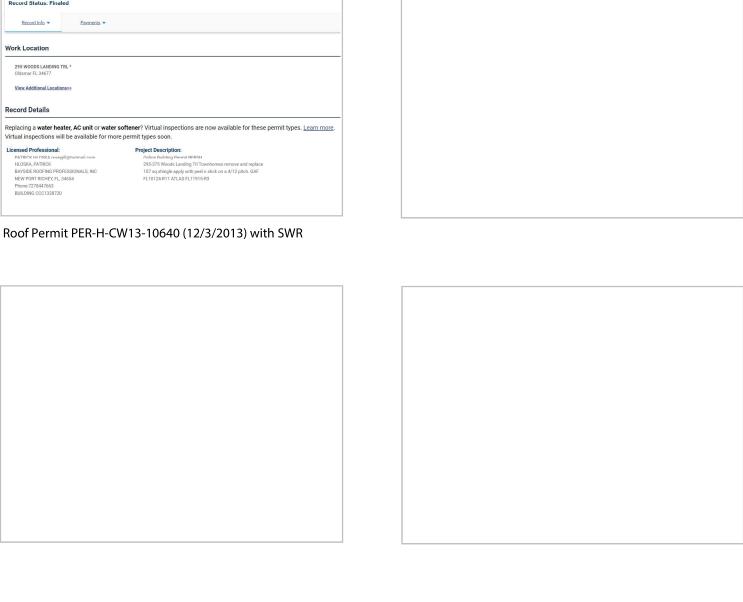

SWR confirmed