

Wind Mitigation Inspection Report



Property Address:

300/310/320/330 Woods Landing Trail Oldsmar, Florida 34677

Prepared For:

East Lake Woodlands Woods Landing

www.nealinspections.com



"Inspected once, Inspected right" "

www.Nachi.org





Neal Inspections LLC nealinspections@gmail.com



Troy Neal: (813) 545-5363

William Neal: (813) 352-4690

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Owner Information	Inspection Date: 3/07/2024						
Owner Name: East Lake Woodlands Woods Landing Trail Home Phone:	•						
Address: 300 - 330 Woods Landing Trail    Address: 300 - 330 Woods Landing Trail   Zip: 34677   Work Phone:		Contact Person: Rev	Contact Person: Beverly				
City: Oldsmar  County: Pinelsas  County: Pinelsas  Coll Phone:  County: Pinelsas  Policy #:  Year of Home: 1984 (40 years)  ## of Stories: Two  Policy #:  Year of Home: 1984 (40 years)  ## of Stories: Two  Limit: bneubecker@ameritechmail.com  NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.  1. Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miamir-Dade or Broward counties). South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miamir-Dade or Broward counties). South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miamir-Dade or Broward counties). South Florida Building Code (FBC 2001 or later) OR, south a date after 3/1/2002. Building Permit Application Date osoroovyyy  B For the HVHZ (DN); Built in compliance with the FBC-94. Year Built  A Built in compliance with the Article Permit Application Date osoroovyyy  C U. Unknown or does not meet the requirements of Answer "A" or "B"  Roof Covering; Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering be dentified.  1. Application of Covering Shave a Miamir-Dade Product Approval Type (Product Approval Brown Replacement)  2. A All roof coverings have a Miamir-Dade Product Approval Brown Replacement of Story and Product Approval Brown Replacement of Story and Product Approval Brown Replacement of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.  B All roof coverings							
County: Finellas    Router Company:   Policy #:	•						
Notice   Standard Company:   Policy #:   Email:   Insulation   Insulation   Email:   Insulation			1 01011				
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.  1. Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade Permit Application Date oswapovyyy).  □ South of the HVHZ (Miami-Dade Permit Application Date oswapovyyy).  □ C. Unknown or does not meet the requirements of Answer "A" or "B".  2. Roof Covering: Select all prof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.  □ 1. Anghabi-Everglan Shade  B/Sold Parket Product Approval Builting current at time of installation OR have a roofing permit application date on or after 31/1/202 OR the roof is original and built in 2004 or later.  □ 3. Month of coverings have a Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application after 91/1/1994 and before 31/1/2002 OR the roof is original and built in 1997 or later.  □ 4. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR for the HVHZ only) a roofing permit application after 91/1/1994 and before 31/1/2002				Policy #:			
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.  1. Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade Permit Application Date oswapovyyy).  □ South of the HVHZ (Miami-Dade Permit Application Date oswapovyyy).  □ C. Unknown or does not meet the requirements of Answer "A" or "B".  2. Roof Covering: Select all prof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.  □ 1. Anghabi-Everglan Shade  B/Sold Parket Product Approval Builting current at time of installation OR have a roofing permit application date on or after 31/1/202 OR the roof is original and built in 2004 or later.  □ 3. Month of coverings have a Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application after 91/1/1994 and before 31/1/2002 OR the roof is original and built in 1997 or later.  □ 4. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR for the HVHZ only) a roofing permit application after 91/1/1994 and before 31/1/2002	Year of Home: 1984 (40 years)	# of Stories: Two		Email: bneubecker@	ameritechmail.com		
1. Building Code: Was the structure built in compliance with the Florida Building Code (FBC-201) or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?  A. Built in compliance with the FBC. Year Built  For homes built in 2002/2003 provide a permit application with a date after 3/1/2002. Building Permit Application Date observery?  B. For the HVHZ Only: Built in compliance with the FBC-94. Year Built  For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994; Building Permit Application Date observery?  C. Unknown or does not meet the requirements of Answer "A" or "B"  2. Roof Covering; Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.  Permit Application  FBC or MDC  1. Aughato-Thoughase Saingle  8/05/2014  1. Do not coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval Listing current at time of installation OR flor the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/202 OR the roof is original and built in 2004 or later.  D. No roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/202 OR the roof is original and built in 2004 or later.  D. No roof coverings do not meet the requirements of Answer "A" or "B	NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3						
covering identified.  2.1 Roof Covering Type:    Permit Application   Date   Product Approval #   Product #   Prod	<ul> <li>1. <u>Building Code</u>: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?</li> <li>A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)</li> <li>B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)</li> <li>C. Unknown or does not meet the requirements of Answer "A" or "B"</li> </ul>						
2.1 Roof Covering Type:		acement OK indicate tha	t no information wa	as available to verify compila			
2. ConcreteClay Tile  3. Metal  4. Bailt Up  6. Other  6. Other  6. Other  7. A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.  B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.  C. One or more roof coverings do not meet the requirements of Answer "A" or "B".  D. No roof coverings meet the requirements of Answer "A" or "B".  3. Roof Deck Attachment: What is the weakest form of roof deck attachment?  A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent to have an equivalent or seven and the product of screws and					Provided for		
□ 3. Metal □ 4. Built Up □ □ 5. Membrane □ □ □ 6. Other □ □ □ □ 5. Membrane □ □ □ 6. Other □ □ □ □ □ 5. Membrane □ □ □ □ □ 5. Membrane □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □	1. Asphalt/Fiberglass Shingle	(05/2014					
<ul> <li>□ 4. Built Up</li> <li>□ 5. Membrane</li> <li>□ 6. Other</li> <li>□ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>□ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> <li>□ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>□ D. No roof coverings meet the requirements of Answer "A" or "B".</li> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>□ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>☑ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter</li></ul>	2. Concrete/Clay Tile						
<ul> <li>□ S. Membrane</li> <li>□ G. Other</li> <li>□ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>□ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> <li>□ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>□ D. No roof coverings meet the requirements of Answer "A" or "B".</li> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>□ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>☑ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to ha</li></ul>	3. Metal						
<ul> <li>✓ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> <li>☐ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>☐ D. No roof coverings meet the requirements of Answer "A" or "B".</li> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>☐ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>☐ B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>✓ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is</li></ul>	4. Built Up				$\overline{\Box}$		
<ul> <li>✓ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> <li>☐ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>☐ D. No roof coverings meet the requirements of Answer "A" or "B".</li> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>☐ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>☐ B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>✓ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is</li></ul>	5. Membrane				$\overline{\Box}$		
<ul> <li>✓ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> <li>☐ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>☐ D. No roof coverings meet the requirements of Answer "A" or "B".</li> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>☐ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>☐ B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>✓ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is</li></ul>	_						
<ul> <li>A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent</li> </ul>	<ul> <li>installation OR have a roofing per</li> <li>B. All roof coverings have a Mian roofing permit application after 9/</li> <li>C. One or more roof coverings do</li> </ul>	mit application date on oni-Dade Product Approv 1/1994 and before 3/1/20 not meet the requirement	or after 3/1/02 OR to al listing current at 2002 OR the roof is of this of Answer "A" of	the roof is original and built in time of installation OR (for too original and built in 1997 or built in the control of the c	n 2004 or later. The HVHZ only) a		
<ul> <li>A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent</li> </ul>							
other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.  C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent	<ul> <li>A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of</li> </ul>						
24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent	other deck fastening system or tre maximum of 12 inches in the field	uss/rafter spacing that is for has a mean uplift re	shown to have an sistance of at least	equivalent or greater resista 103 psf.	nce 8d nails spaced a		
Inspectors finitians 1 toperty Address	24"inches o.c.) by 8d common na decking with a minimum of 2 nail Any system of screws, nails, adhe	24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent					
	Inspectors Initials Troperty Addi	ress_000/010/020/030	VVOOGS LANGIN	9 11411			

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

			greater res 2 psf.	istance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
	П		•	ed Concrete Roof Deck.
	ī			
				or unidentified.
			No attic a	
4.				<b>achment:</b> What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within e or outside corner of the roof in determination of WEAKEST type)
			Toe Nails	•• /
				Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
				Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mir	nim	al condition	ons to qualify for categories B, C, or D. All visible metal connectors are:
				Secured to truss/rafter with a minimum of three (3) nails, and
			<b></b>	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.
	✓	B.	Clips	
			☑	Metal connectors that do not wrap over the top of the truss/rafter, or
	_		Ц	Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
	Ш	C.	Single W	
		ъ	Dardala V	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
	Ш	υ.	Double V	Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>
				Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
			Structural Other:	Anchor bolts structurally connected or reinforced concrete roof.
				or unidentified
		Н.	No attic a	ccess
5.				What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A.	Hip Roof	
		_	EL D	Total length of non-hip features: feet; Total roof system perimeter: feet
			Flat Roof	less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	✓	C.	Other Ro	of Any roof that does not qualify as either (A) or (B) above.
6.		А. В.	SWR (also sheathing dwelling No SWR.	
	Ш	C.	Unknown	or undetermined.
Ins	spec	tor	s Initials 7	N Property Address 300/310/320/330 Woods Landing Trail
*T	his v	veri	ification fo	orm is valid for up to five (5) years provided no material changes have been made to the structure or

inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure							
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
N	Opening Protection products that appear to be A or B but are not verified							
	Other protective coverings that cannot be identified as A, B, or C							
х	No Windborne Debris Protection	X						

J	A. Exterior Openings Cyclic Pressure and 9-1b Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
	a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
	system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
	and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996

Inspectors Initials TN Property Address 300/310/320/330 Woods Landing Trail

For Garage Doors Only: ANSI/DASMA 115

	A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
	A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
	A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
i	B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
	• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
	• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
	• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
	B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
	B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
	B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
	C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with allowood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
	C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
	C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
	C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter protective coverings not meeting the requirements of A with no documentation of compliance (Level N in the	Answer "A", "B", or C" or sy				
with no documentation of compliance (Level N in the table above).					
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist  N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above					
N.3 One or More Non-Glazed openings is classified as Le	vel X in the table above				
X. None or Some Glazed Openings One or more Gla		Level X in the table above.			
MITIGATION INSPECTIONS MUST Section 627.711(2), Florida Statutes, pro	~	who may sign this form.			
Qualified Inspector Name: Troy Neal	License Type: Home Inspector	License or Certificate #: HI-10032			
Inspection Company:		Phone:			
Neal Inspections LLC		813-545-5363			
Oualified Inspector − I hold an active license as a Home inspector licensed under Section 468.8314, Florida Statu training approved by the Construction Industry Licensing Board Building code inspector certified under Section 468.607, Florida General, building or residential contractor licensed under Section Professional engineer licensed under Section 471.015, Florida General, building or residential contractor licensed under Section 471.015, Florida General architect licensed under Section 481.213, Florida General architect licensed under General architect licensed under General architec	ttes who has completed the statud and completion of a proficience a Statutes. on 489.111, Florida Statutes. Statutes. Statutes. Statutes the necessary qualification	ry exam.			
Individuals other than licensed contractors licensed under under Section 471.015, Florida Statues, must inspect the s Licensees under s.471.015 or s.489.111 may authorize a di experience to conduct a mitigation verification inspection.	r Section 489.111, Florida S tructures personally and no rect employee who possesse	ot through employees or other persons.			
I, am a qualified inspector and I personally performed the inspection or (licensed (print name)  contractors and professional engineers only) I had my employee () perform the inspection (print name of inspector)					
and I agree to be responsible for his/her work.  Qualified Inspector Signature:					
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.					
<u>Homeowner to complete</u> : I certify that the named Qualificersidence identified on this form and that proof of identification					
Signature:	Date:				
An individual or entity who knowingly provides or utters obtain or receive a discount on an insurance premium to of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes o as offering protection from hurricanes.	nly and cannot be used to c	ertify any product or construction feature			
Inspectors Initials TN Property Address 300/310/320/330 Woods Landing Trail					
*This verification form is valid for up to five (5) years proinaccuracies found on the form.	vided no material changes	have been made to the structure or			

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 4 of 4



300/310/320/330 Woods Landing Trail




Rear



Side Elevation



Side Elevation

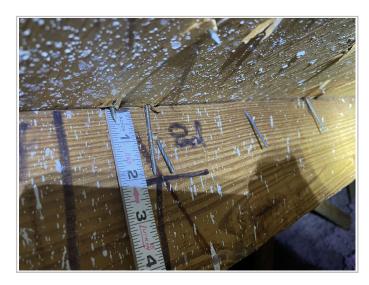

8d Ringshank Renail



8d Nails within 6"



Clips observed



Roof Permit PER-H-CW14-07607 (8/05/2014) with SWR

