

Wind Mitigation Inspection Report



Property Address:

90/100/110/120 Woods Landing Trail Oldsmar, Florida 34677

Prepared For:

East Lake Woodlands Woods Landing

www.nealinspections.com



"Inspected once, Inspected right" "

www.Nachi.org





Neal Inspections LLC nealinspections@gmail.com



Troy Neal: (813) 545-5363

William Neal: (813) 352-4690

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspect	ion Date: 3/07/2024	y 32	- 6-							
	Owner Information									
Owner	Name: East Lake Woodland		Contact Person: Bev	erly						
	s: 90/100/110/120 Woods L			Home Phone:						
	Oldsmar	Zip:	34677	Work Phone:						
	Pinellas			Cell Phone:						
	ce Company:			Policy #:						
Year of	Home: 1984 (40 years)	# of Stories: Two		Email: bneubecker@	ameritechmail.com					
accomp	Any documentation used in pany this form. At least one party 7. The insurer may ask additional terms in the control of the con	hotograph must accompa	ny this form to val	lidate each attribute marked	l in questions 3					
the	Iding Code: Was the structure HVHZ (Miami-Dade or Browar A. Built in compliance with the	d counties), South Florida	Building Code (SFI	BC-94)?						
	a date after 3/1/2002: Building	Permit Application Date (N	MM/DD/YYYY)		mit application with					
	B. For the HVHZ Only: Built in provide a permit application with C. Unknown or does not meet to	th a date after 9/1/1994: B	uilding Permit Appl							
		-		1 + OD FDC/MDC D 1						
OR	of Covering: Select all roof cov Year of Original Installation/Re- ering identified.									
	2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance					
	1. Asphalt/Fiberglass Shingle	11/21/14								
	2. Concrete/Clay Tile				П					
	3. Metal				$\overline{\sqcap}$					
	4. Built Up				$\overline{\Box}$					
	5. Membrane				Ē					
	6. Other				H					
										
	A. All roof coverings listed aboundable installation OR have a roofing part of the control of the covering part of	permit application date on	or after 3/1/02 OR t	he roof is original and built in	1 2004 or later.					
	B. All roof coverings have a M roofing permit application after									
	C. One or more roof coverings	•		or "B".						
	D. No roof coverings meet the	requirements of Answer "A	A" or "B".							
3. Roo	of Deck Attachment: What is the	e weakest form of roof de	ck attachment?							
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.									
	B. Plywood/OSB roof sheathir 24"inches o.c.) by 8d common other deck fastening system or maximum of 12 inches in the fi	nails spaced a maximum of truss/rafter spacing that i	of 12" inches in the s shown to have an	fieldOR- Any system of scr equivalent or greater resistan	ews, nails, adhesives,					
7	C. Plywood/OSB roof sheathir 24"inches o.c.) by 8d common decking with a minimum of 2 r. Any system of screws, nails, ac	ng with a minimum thickness and spaced a maximum sails per board (or 1 nail p	ess of 7/16"inch atta of 6" inches in the f er board if each boa ning system or truss	ched to the roof truss/rafter (stieldOR- Dimensional lumber of its equal to or less than 6 its/rafter spacing that is shown	per/Tongue & Groove aches in width)OR-					

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

			greater res 2 psf.	istance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
	П		1	d Concrete Roof Deck.
				or unidentified.
		G.	No attic a	ccess.
4.	5 fe	et o	of the insid	achment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within e or outside corner of the roof in determination of WEAKEST type)
	Ш	A.	Toe Nails	
				Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
			Ш	Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mir	im	al conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:
			✓	Secured to truss/rafter with a minimum of three (3) nails, and
			✓	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	✓	В.	Clips	
				Metal connectors that do not wrap over the top of the truss/rafter, or
		<u> </u>	G: 1 377	Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
	ш	C.	Single W	aps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
		Б.	D 11 11	minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
	Ш	D.	Double V	Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
				Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
			Structural Other:	Anchor bolts structurally connected or reinforced concrete roof.
	$\overline{\Box}$			or unidentified
			No attic a	
5.				What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A.	Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.
		В.	Flat Roof	
	√	C.	Other Roo	less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft of Any roof that does not qualify as either (A) or (B) above.
6.		А. В.	SWR (also sheathing dwelling to SWR.	r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) of called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.
Ins	spec	tors	s Initials T	N Property Address 90/100/110/120 Woods Landing Trail
*T	his v	zeri	fication fo	rm is valid for up to five (5) years provided no material changes have been made to the structure or

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

•	ning Protection Level Chart		Non-Glazed Openings						
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors		
N/A	Not Applicable- there are no openings of this type on the structure								
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)								
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)								
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007								
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance								
N	Opening Protection products that appear to be A or B but are not verified								
IN	Other protective coverings that cannot be identified as A, B, or C								
Х	No Windborne Debris Protection	X							
a sy	 Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb minimum, with impact resistant coverings or products listed as wind by stem of the State of Florida or Miami-Dade County and meet the required Large Missile Impact" (Level A in the table above). Miami-Dade County PA 201, 202, and 203 	orne debri	s protecti	on devices	in the p	product a	approval		
 Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 									
	American Society for Testing and Materials (ASTM) E 1886	· · · · · · · · · · · · · · · · · · ·							
	Southern Standards Technical Document (SSTD) 12	7101111	2 1//0						
	• For Skylights Only: ASTM E 1886 and ASTM E 1996								

Α.	.1	All	Non	-Glaz	ed	openings	classi	fied a	is A	\ in	the	table	abo	ve,	or no	No	n-	Glazed	oper	nings	exist

A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above

A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above

For Garage Doors Only: ANSI/DASMA 115

B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):

- ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
- SSTD 12 (Large Missile 4 lb. to 8 lb.)
- For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)

■B.1 All Non-Glazed	openings classifie	ed as A or B i	in the table above,	or no Non-Glazed	openings exist

- B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

<u>C.</u>	Exterior	Opening	Protection-	Wood	Structural	Panels	meeting	FBC	2007	All	Glazed	openings	are	covered	with
plyv	wood/OSI	B meeting t	the requireme	nts of T	able 1609.1	.2 of the	FBC 200'	7 (Lev	el C ir	the 1	table abo	ove).			

LC.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials TN Property Address 90/100/110/120 Woods Landing Trail

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter protective coverings not meeting the requirements of A								
protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).								
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist								
N.2 One or More Non-Glazed openings classified as Leve table above	l D in the table above, and no N	on-Glazed openings classified as Level X in the						
N.3 One or More Non-Glazed openings is classified as Le		137. 4 . 11 . 1						
✓ X. None or Some Glazed Openings One or more Gla	zed openings classified and I	Level X in the table above.						
MITIGATION INSPECTIONS MUST Section 627.711(2), Florida Statutes, pro	vides a listing of individuals	who may sign this form.						
Qualified Inspector Name: Troy Neal	License Type: Home Inspector	License or Certificate #: HI-10032						
Inspection Company: Neal Inspections LLC		Phone: 813-545-5363						
•	a. (chack ana)	1 0 10 0 10 0000						
Qualified Inspector – I hold an active license as a: (check one) ✓ Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam. ☐ Building code inspector certified under Section 468.607, Florida Statutes. ☐ General, building or residential contractor licensed under Section 489.111, Florida Statutes. ☐ Professional engineer licensed under Section 471.015, Florida Statutes. ☐ Professional architect licensed under Section 481.213, Florida Statutes. ☐ Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.								
Individuals other than licensed contractors licensed under	r Section 489.111, Florida S	tatutes, or professional engineer licensed						
under Section 471.015, Florida Statues, must inspect the s								
Licensees under s.471.015 or s.489.111 may authorize a di experience to conduct a mitigation verification inspection.		es the requisite skill, knowledge, and						
	•	d the inspection or (<i>licensed</i>						
(print name)	and I personany periormet	a the inspection of <i>(acensea</i>						
contractors and professional engineers only) I had my emp) perform the inspection of inspector)						
and I agree to be responsible for his/her work. Qualified Inspector Signature:	Date: 3/07	•						
An individual or entity who knowingly or through gross n	egligence provides a false o	or fraudulent mitigation verification form is						
subject to investigation by the Florida Division of Insuran								
appropriate licensing agency or to criminal prosecution. (certifies this form shall be directly liable for the misconduperformed the inspection.								
Homeowner to complete: I certify that the named Qualifi	ed Inspector or his or her em	ployee did perform an inspection of the						
residence identified on this form and that proof of identificati								
Signature: Date:								
An individual or entity who knowingly provides or utters obtain or receive a discount on an insurance premium to of the first degree. (Section 627.711(7), Florida Statutes)								
The definitions on this form are for inspection purposes o as offering protection from hurricanes.	nly and cannot be used to c	ertify any product or construction feature						
Inspectors Initials TN Property Address 90/100/110/1	20 Woods Landing Trail							
*This verification form is valid for up to five (5) years proinaccuracies found on the form.	vided no material changes	have been made to the structure or						

Page 4 of 4

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



90/100/110/120 Woods Landing Trail



Side Elevation



8d Ringshank Renail



Rear




Side Elevation



8d Nails within 6"



SWR confirmed

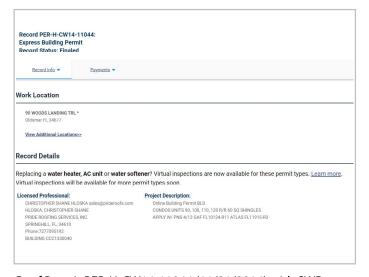

Roof Permit PER-H-CW14-11044 (11/21/2014) with SWR

